



Panel Mount




Sample Product Code **RS2/1A2500F00145**

Series	# of Poles	/	Montage Type	Electrical Values	Contact Diagram	Camshaft 0-Position	Terminal Type		Camshaft Length		
<b>RS</b>	<b>2</b>	<b>/</b>	<b>1</b>	<b>A</b>	<b>2500</b>	<b>Flat: F</b> <b>Reverse: R</b>	<b>0</b>	<b>0</b>	<b>1</b>	<b>4</b>	<b>5</b>
RS	2 3 4 5 6 7 8	/	1: Without Nut 2: With Nut	A: 10A T125 C: 16A T125	2500 (D) 2600 (T) 2700 (D) 2800 (T) 2900 (D) 4528 (T) 3500 (D-T) 3560 (T) 3700 (D) 3800 (T-R) 3900 (D) 3400 (T) 3300 (D) 4500 (D-T) 4600 (T) 4700 (T) 5500 (R) 5600 (F) 5700 (F) 5800 (R) 5900 (R)	Flat (F) Reverse (R)					

20



**RS-2**

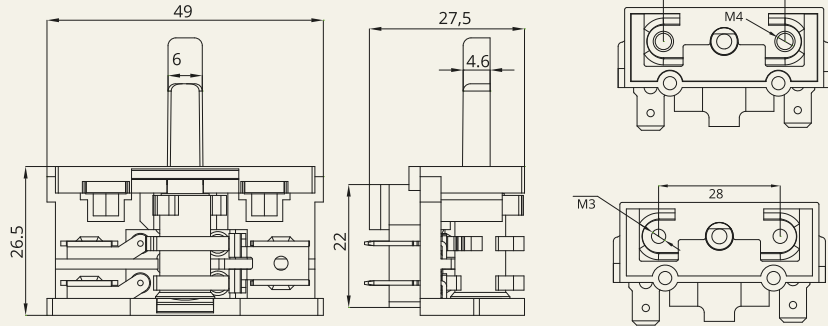

Contact Diagram


Series	Pos.	0°	30°	60°	90°
		□	◊	◊	◊
Contact		0	1	2	3
2500-D	1-1a		X		X
	2-2a			X	X

Series	Pos.	0°	90°	180°	270°
		◊	◊	◊	◊
Contact		0	1	2	3
2600-T	1-1a			X	X
	2-2a		X		X

Series	Pos.	0°	30°	60°
		◊	◊	◊
Contact		0	1	2
2700-D	1-1a		X	X
	2-2a			X

Series	Pos.	0°	30°	60°
		◊	◊	◊
Contact		0	1	2
2900-D	1-1a		X	
	2-2a			X

Terminal Type

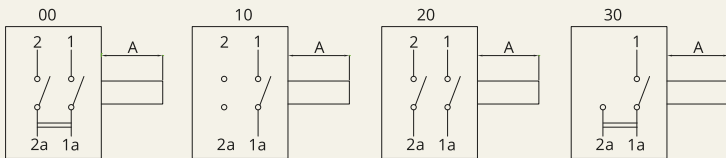

Series	Pos.	0°	90°
		◊	◊
Contact		0	1
2800-T	1-1a		X
	2-2a	X	